
TECHNICAL DATA SHEET

MCW Reflective Sound Screen



The MCW Reflective Sound Screen is engineered to meet the highest standards of performance and durability. It is designed in accordance with the Specification for Highway Works, Clause 2504, and adheres to Sector Scheme 4 treatment requirements.

The system is available with either timber or steel posts and can be installed at heights of up to 5 metres, with post centers set at 3000mm unless otherwise specified.


Key Benefits

- Available heights up to 5,000 mm
- Compatible with timber or steel posts
- Tested to BS EN 1793, BS EN 1794-1 & BS EN 1794-2
- Complies with Highways Sector Scheme 2C

Applications

MCW Reflective Sound Screen is commonly used in residential, commercial, industrial, sports venues, animal shelters, dog kennels, schools & academies, public houses and construction sites.

Acoustic Information

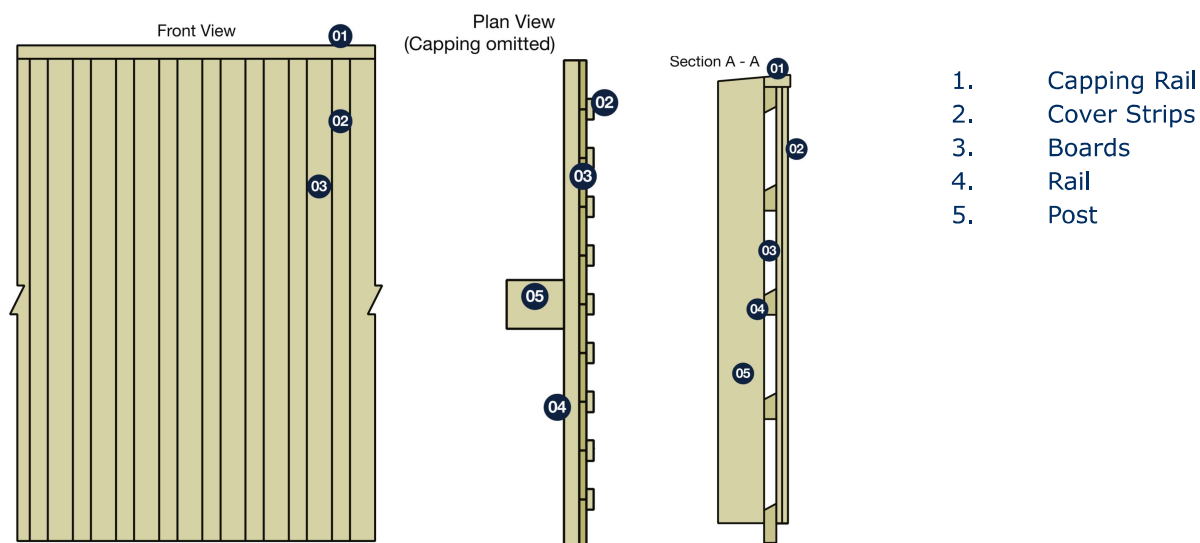

JCW Reflective Sound Screen BS EN 1793-2: 1998. Acoustics - Road traffic noise reducing devices.

Test method for determining the acoustic performance.

Size: 8.64m²

Room

Humidity: 58.6%

DLa: 30

